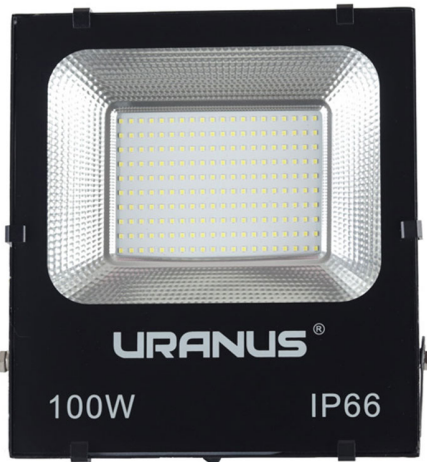


**PRODUCT DATASHEET****URANUS 100W H/DUTY LED FLOOD LIGHT 6000K, 100LM/W, IP66, PF0.9, 85-265V AC WITH SURGE PROTECTION**

SKU: FLD-100C6

**SPECIFICATION:**

|                           |                               |
|---------------------------|-------------------------------|
| <b>Brand</b>              | Uranus                        |
| <b>Power</b>              | 100W                          |
| <b>Colour Temperature</b> | 6000-6500K                    |
| <b>Input Voltage</b>      | 85-265V with Surge Protection |
| <b>Lumen</b>              | 90-100lm/w                    |
| <b>IP Rating</b>          | IP 66                         |
| <b>Beam Angle</b>         | 120 degree                    |
| <b>Body Type</b>          | Aluminium                     |
| <b>Warranty</b>           | 2 Years                       |

Categories: [Led Flood Light](#)

These multi-purpose, broad beam heavy duty Led flood lights provide high brightness and an energy-efficient lighting solution in a variety of applications.

URANUS 100W H/Duty Led Flood light 6000K, 100lm/w, IP66, PF0.9,  
85-265V AC with Surge Protection

<https://elekron.co.ke/product/uranus-100w-h-duty-led-flood-light-6000k-100lm-w-ip66-pf0-9-85-265v-ac-with-surge-protection/>



## PRODUCT DATASHEET

- They provide flicker-free lighting.
- Heavy duty die cast aluminum,corrosive resistant body, rated at ip 66.
- Fascia glass sealed with silicone rubber ensuring superior waterproof/airtight performance.
- High power smd led chips.
- Built in constant current driver.
- Built in transient voltage suppressor.

Application - can be used in both residential, commercial and industrial spaces such as driveways, bill boards, parking lots, sports grounds, street lighting etc.

### SPECIFICATIONS:

| SKU           | FLD-100C3             | FLD-100C4             | FLD-100C6             |
|---------------|-----------------------|-----------------------|-----------------------|
| CCT           | 3000-3200K            | 4000-4500K            | 6000-6500K            |
| Power         | 100W                  | 100W                  | 100W                  |
| Input Voltage | 85-265V AC with Surge | 85-265V AC with Surge | 85-265V AC with Surge |
| Power Factor  | 0.9                   | 0.9                   | 0.9                   |
| Lumen         | 90-100lm/w            | 90-100lm/w            | 90-100lm/w            |
| IP Rating     | IP66                  | IP66                  | IP66                  |
| Beam Angle    | 120 degree            | 120 degree            | 120 degree            |
| Warranty      | 2 Years               | 2 Years               | 2 Years               |

### [Colour Temperature Guide](#)

Enquire