




PRODUCT DATASHEET

URANUS 200W H/DUTY LED FLOOD LIGHT 4000K, 100LM/W, IP66, PF0.9, 85-265V AC WITH SURGE PROTECTION (COPY)

SKU: FLD-200C4

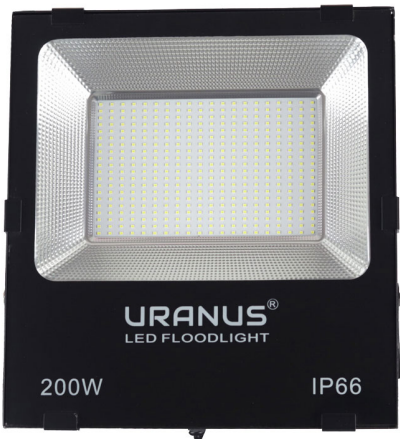

SPECIFICATION:

|                    |                               |
|--------------------|-------------------------------|
| Brand              | Uranus                        |
| Power              | 200W                          |
| Colour Temperature | 4000-4500K                    |
| Input Voltage      | 85-265V with Surge Protection |
| Lumen              | 90-100lm/w                    |
| IP Rating          | IP 66                         |
| Beam Angle         | 120 degree                    |
| Body Type          | Aluminium                     |
| Warranty           | 2 Years                       |

Categories: [Led Flood Light](#)

These multi-purpose, broad beam heavy duty Led flood lights provide high brightness and an energy-efficient lighting solution in a variety of applications.



PRODUCT DATASHEET

- They provide flicker-free lighting.
- Heavy duty die cast aluminum,corrosive resistant body, rated at ip 66.
- Fascia glass sealed with silicone rubber ensuring superior waterproof/airtight performance.
- High power smd led chips.
- Built in constant current driver.
- Built in transient voltage suppressor.

Application - can be used in both residential, commercial and industrial spaces such as quarries, housing estates, airports, sports grounds, street lighting etc.

They are also often used to illuminate outdoor playing fields while an outdoor sports event is being held during low-light conditions.

SPECIFICATIONS:

| SKU           | FLD-200C4             | FLD-200C6             |
|---------------|-----------------------|-----------------------|
| CCT           | 4000-4500K            | 6000-6500K            |
| Power         | 200W                  | 200W                  |
| Input Voltage | 85-265V AC with Surge | 85-265V AC with Surge |
| Power Factor  | 0.9                   | 0.9                   |
| Lumen         | 90-100lm/w            | 90-100lm/w            |
| IP Rating     | IP66                  | IP66                  |
| Beam Angle    | 120 degree            | 120 degree            |
| Warranty      | 2 Years               | 2 Years               |

Colour Temperature Guide

Enquire